installation and operation manual for Hunter Ceiling Fans

42008-01 • 12/07/05

Welcome

For Your Records and Warranty Assistance

Model Name: _____

Catalog/Model No.: _____

Serial No.: _____

Date Purchased: _____

Where Purchased: _____

For reference also attach your receipt or a copy of your receipt to the manual.

Table of Contents

1 • Getting Ready 4

2 • Installing the Hanger Bracket 5

3 • Assembling and Hanging the Fan 6

4 • Wiring the Fan 7

5 • Installing the Canopy 8

6 • Assembling the Blades 9

7 • Installing the Switch Housing 10

8 • Operating and Cleaning Your Ceiling Fan 11

9 • Troubleshooting 12

© 2004 Hunter Fan Company

Your new Hunter® ceiling fan is an addition to your home or office that will provide comfort and performance for many years. This installation and operation manual gives you complete instructions for installing and operating your fan.

We are proud of our work. We appreciate the opportunity to supply you with the best ceiling fan available anywhere in the world.

Before installing your fan, for your records and warranty assistance, record information from the carton and Hunter nameplate label (located on the top of the fan motor housing).

Cautions and Warnings

- Read this entire manual carefully before beginning installation. Save these instructions.
- Use only Hunter replacement parts.
- To reduce the risk of personal injury, attach the fan directly to the support structure of the building according to these instructions, and use only the hardware supplied.
- To avoid possible electrical shock, before installing your fan, disconnect the power by turning off the circuit breakers to the outlet box and associated wall switch location. If you cannot lock the circuit breakers in the off position, securely fasten a prominent warning device, such as a tag, to the service panel.
- All wiring must be in accordance with national and local electrical codes and ANSI/NFPA 70. If you are unfamiliar with wiring, use a qualified electrician.
- To reduce the risk of personal injury, do not bend the blade attachment system when installing, balancing, or cleaning the fan. Never insert foreign objects between rotating fan blades.
- To reduce the risk of fire, electrical shock, or motor damage, do not use a solid-state speed control with this fan. Use only Hunter speed controls.

Understanding Mounting

Hunter's patented mounting system provides you maximum installation flexibility and ease. You can install your Hunter fan in one of two ways, depending on your preference: Standard or Angle mounting. The steps in this manual include instructions for both mounting methods.

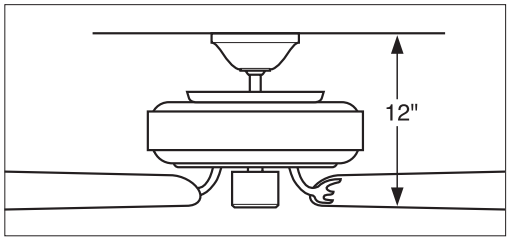

Standard Mounting hangs from the ceiling by a downrod (included), recommended for ceilings 8 feet or higher

Considering Optional Accessories

Consider using Hunter's optional accessories, including a wall-mounted or remote speed control. To install and use the accessories, follow the instructions included with each product. For quiet and optimum performance of your Hunter fan, use only Hunter speed controls.

For ceilings higher than 8 feet, you can purchase Hunter extension downrods. All Hunter fans use sturdy 3/4" diameter pipe to assure stability and wobble-free performance.

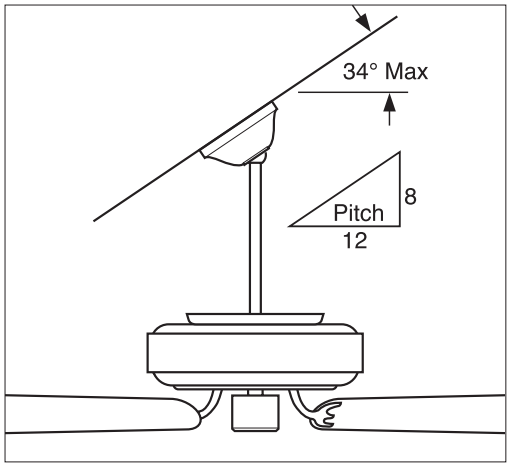

Angle Mounting recommended for a vaulted or angled ceiling

To install a ceiling fan, be sure you can do the following:

- Locate the ceiling joist or other suitable support in ceiling.
- Drill holes for and install wood screws.
- Identify and connect electrical wires.
- Lift 40 pounds.

If you need help installing the fan, your Hunter fan dealer can direct you to a licensed installer or electrician.

Gathering the Tools

You will need the following tools for installing the fan:

- Electric drill with 9/64" bit
- Standard screwdriver
- Phillips-head screwdriver
- Wrench or pliers

Checking Your Fan Parts

Carefully unpack your fan to avoid damage to the fan parts. Check for any shipping damage to the motor or fan blades. If one of the fan blades was damaged in shipment, return all the blades for replacement.

If any parts are missing or damaged, contact your Hunter dealer or call Hunter Parts Department at 888-830-1326.

Installing Multiple Fans?
If you are installing more than one fan, keep the fan blades in sets, as they were shipped.

Preparing the Fan Site

Before you begin installing the fan, follow all the instructions in the pullout sheet called "Preparing the Fan Site." Proper ceiling fan location and attachment to the building structure are essential for safety, reliable operation, maximum efficiency, and energy savings.

2 • Installing the Hanger Bracket

2-1. Drill two pilot holes into the wood support structure through the outermost holes in the outlet box. The pilot holes should be 9/64" in diameter.

2-2. Align the slotted holes in the hanger bracket with the pilot holes you drilled in the wood support structure. For proper alignment use slotted holes directly across from each other. If you are installing the fan on an **angled** ceiling, be sure to orient the hanger bracket with the large opening towards the ceiling peak.

2-3. Use an indelible marker to mark the exact location of the pilot holes relative to the slots on the hanger bracket. Remove the hanger bracket.

2-4. Partially install two canopy screws (about 2 full turns) in the hanger bracket.

2-5. Place the ceiling gasket over the hanger bracket so that the slots and the raised surfaces on the ceiling gasket align with the slots and holes on the hanger bracket.

2-6. Use a 3" screw to pierce two holes in the ceiling gasket that match the pilot holes you drilled in step 2-1. Use the marks on the hanger bracket from step 2-3 as your guide.

2-7. Thread the lead wires from the outlet box down through the hole in the middle of the ceiling gasket and hanger bracket.

Note: The ceiling gasket should be flush against the ceiling.

2-8. Place a flat washer on each of the two 3 " screws and pass the screws through the ceiling gasket and hanger bracket into the pilot holes you drilled.

Tighten the screws into the 9/64" pilot holes; do not use lubricants on the screws. Do not over tighten.

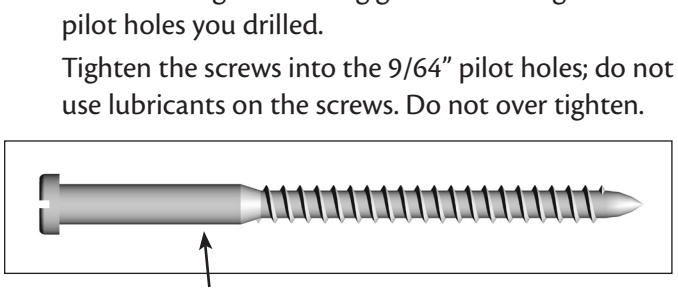





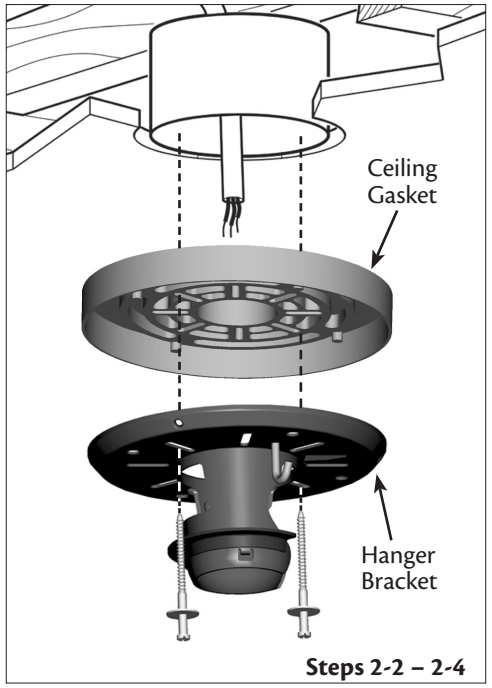

Steps 2-2 – 2-4

Step 2-3 (Angled Ceiling Only)

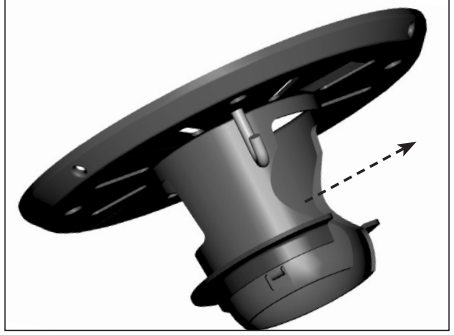

For Angled Ceilings: Be sure to orient the hanger bracket with the large opening towards the ceiling peak.

3 • Assembling and Hanging the Fan

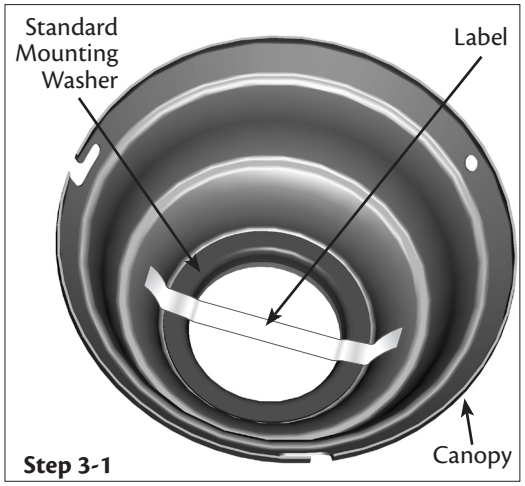

Step 3-1

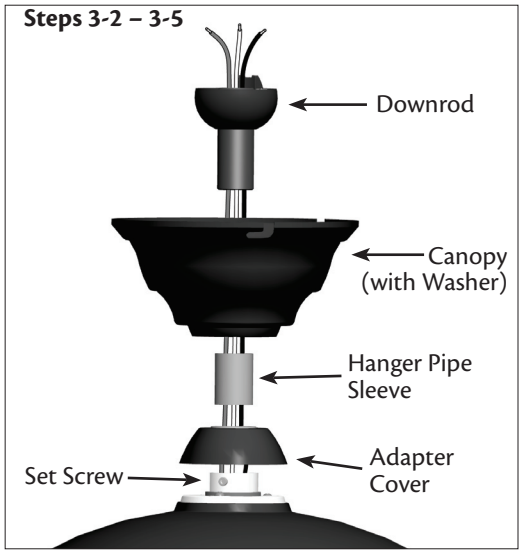

Steps 3-2 – 3-5

You can assemble your fan for **standard** or **angle** mounting as shown in steps 3-1 – 3-7.

3-1. Remove the label from the standard mounting washer inside the canopy. Leave the washer in place.

3-2. To assemble the fan to hang down from a flat or angled ceiling, insert the downrod through the canopy.

3-3. Feed the wires from the fan through the downrod.

3-4. Screw the downrod into the fan assembly.

3-5. Using the provided allen wrench, loosen the allen head set screw on the adapter to install the pipe and ball assembly. **Note:** When the pipe and ball assembly is fully installed, 2-3 threads on the pipe will still be visible; this is normal. Securely retighten the set screw with the allen wrench.

⚠ **CAUTION:** The adapter has a special coating on the threads. Do not remove this coating; the coating prevents the downrod from unscrewing. Once assembled, do not remove the downrod.

⚠ **WARNING:** Do not carry or lift fan by canopy.

3-6. Raise the fan and place the ball into the hanger bracket.

3-7. Align the notch on the ball with the indent in the hanger bracket. (Rotate the fan until you hear the notch pop into place.)

⚠ **WARNING:** Fan may fall if not assembled as directed in these installation instructions.

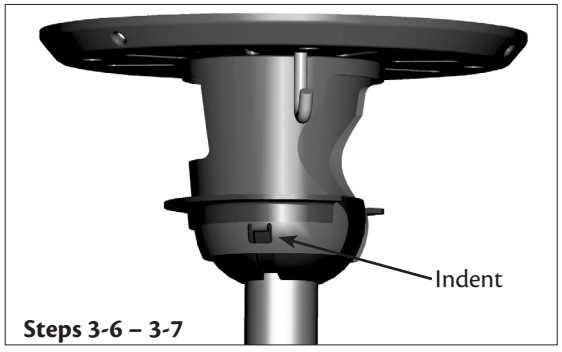

Steps 3-6 – 3-7

All wiring must be in accordance with national and local electrical codes and ANSI/NFPA 70. If you are unfamiliar with wiring, use a qualified electrician.

Wall switches are not included. Select an acceptable general-use switch in accordance with national and local electrical codes.

4-1. Disconnect the power by turning off the circuit breakers to the outlet box and associated wall switch location.

4-2. Decide how you want to set up the fan and light controls. You can control the fan and/or lights together or separately using one or two wall switches. Follow Step 4-3 **OR** Step 4-4, depending on what you decide.

Note: If you are not installing a light kit, follow step 4-4.

4-3. If you want to, you can control the fan and light separately using two wall switches, connect the wires as follows:
- The bare or green ground wire from the ceiling to the green ground wire from the hanger bracket and the green ground wire from the fan
- The white wire from the ceiling to the white wire from the fan
- The black wire from the ceiling to the black wire from the fan
- The black/white wire from the fan to the wire for the wall switch

4-4. Alternatively, you can control both fan and light with one switch. To do so connect the wires as follows:
- The bare or green ground wire from the ceiling to the green ground wire from the hanger bracket and the green ground wire from the fan
- The white wire from the ceiling to the white wire from the fan
- The black wire from the ceiling to the black and the black/white wire from the fan

4-5. To connect the wires, hold the bare metal leads together and place a wire nut over them, then twist clockwise until tight.

⚠ **CAUTION:** Be sure no bare wire or wire strands are visible after making connections.

4-6. Push all wires and wire nuts back into the hanger bracket.

Step 4-3

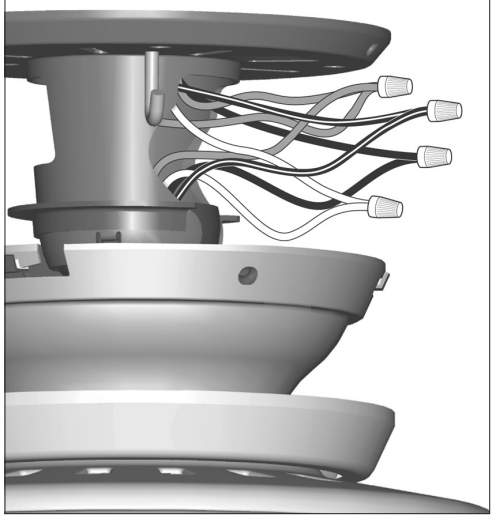

Step 4-4

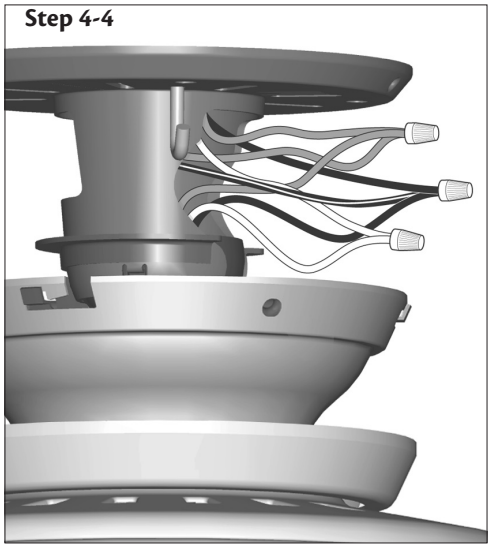

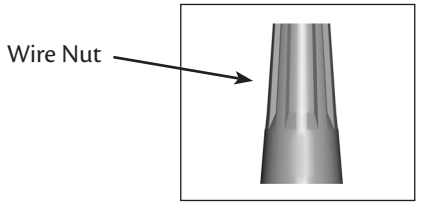

5 • Installing the Canopy

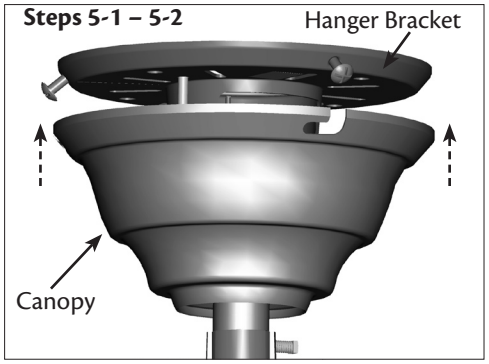

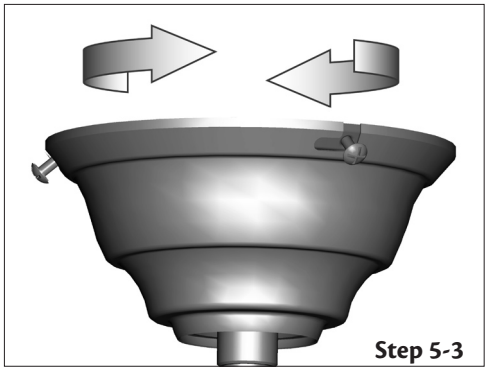

Note: To adjust the canopy screws in steps 5-1 – 5-3, you will need to reach under and pull up the rim of the ceiling gasket.

5-1. Raise the canopy over the hanger bracket. Align partially installed screws with key slots in canopy.

5-2. Twist canopy clockwise to secure.

5-3. Install third canopy screw in round hole on canopy. Securely tighten all three screws.

6 • Assembling the Blades

Hunter fans use several styles of fan blade irons (brackets that hold the blade to the fan).

6-1. Your fan may include blade grommets. If your fan has grommets, insert them by hand into the holes on the blades.

6-2. Attach each blade to a blade iron using three blade assembly screws. If you used grommets, the blades may appear slightly loose after screws are tightened. This is normal.

6-3. For each blade, insert one blade mounting screw through the blade iron, and attach lightly to the fan. Insert the second blade mounting screw, then securely tighten both mounting screws.

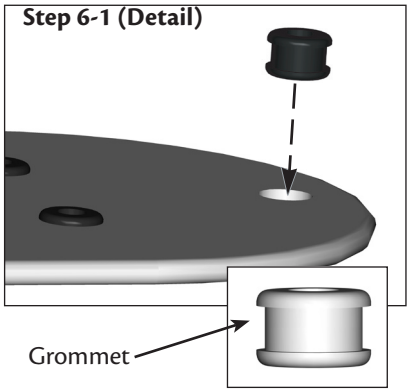

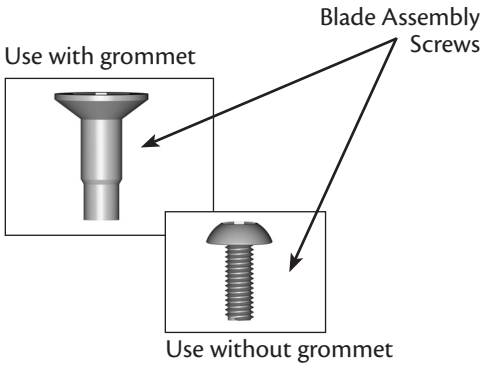

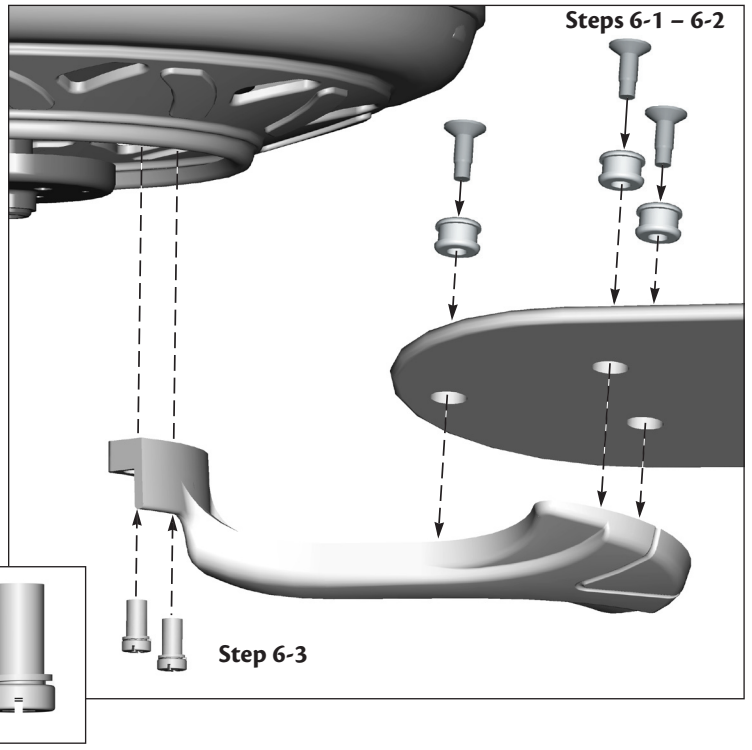

7 • Installing the Switch Housing

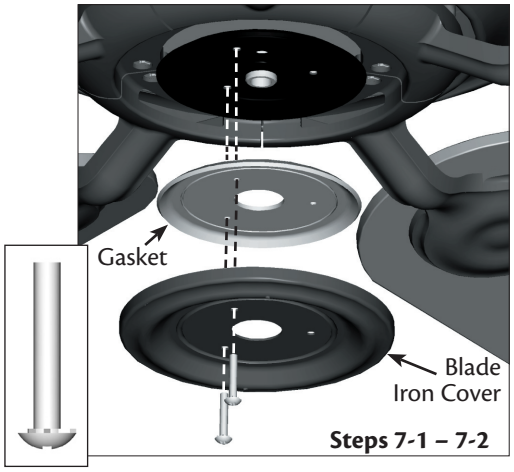

Steps 7-1 – 7-2

Note: If you are installing a light fixture, do NOT install the switch housing without first referring to the instructions included with the light fixture.

7-1. Align the holes on the blade iron cover and gasket and stick two screws through two of the holes.

7-2. Thread the plug connector from the mounting plate through the gasket and cover. Partially install the gasket and cover to the mounting plate with the two screws.

7-3. Place the upper switch housing over the two screws and turn counterclockwise so that the screws fit securely in the slots.

7-4. Partially install the third screw and then tighten all three screws securely.

7-5. Connect the upper plug connector from the motor to the lower plug connector in the switch housing assembly.

Note: Both plug connectors are polarized and will only fit together one way. Make sure the connectors are properly aligned before connecting them. Incorrect connection could cause improper operation and damage to the product.

7-6. To attach the lower switch housing, thread the thumb screws through the side holes of the upper switch housing and tighten them securely.

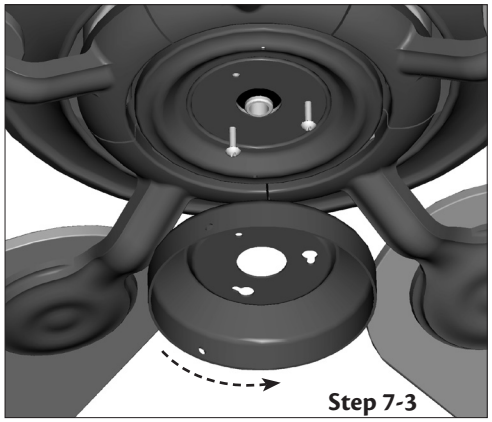
Step 7-3

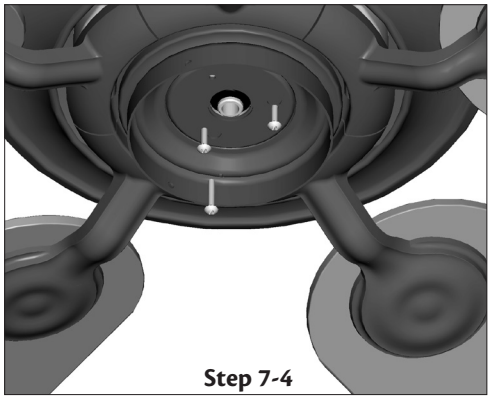
Step 7-4

Note: You can customize your Hunter fan with a number of accessory light kits.



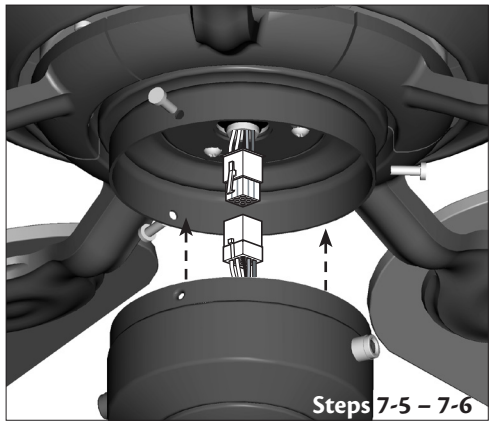
Steps 7-5 – 7-6

8 • Operating and Cleaning Your Ceiling Fan

8-1. Turn on electrical power to the fan.

8-2. The fan pull chain controls power to the fan. The pull chain has four settings in sequence: High, Medium, Low and Off.

- Pull the chain slowly to change settings.
- Release slowly to prevent the chain from recoiling into the blades.
- The chain uses a breakaway connector that separates if the chain is jerked. If this happens, simply reinsert the chain into the connector.

8-3. To change airflow direction, turn the fan off and let it come to a complete stop. Pull the reversing pullchain one time and then restart the fan.

Ceiling fans work best by blowing air downward (counterclockwise blade rotation) in warm weather to cool the room with a direct breeze. In winter, having the fan draw air upward (clockwise blade rotation) will distribute the warmer air trapped at the ceiling around the room without causing a draft.

8-4. For cleaning finishes, use a soft brush or lint-free cloth to prevent scratching. A vacuum cleaner brush nozzle can remove heavier dust. Remove surface smudges or accumulated dirt and dust using a mild detergent and a slightly dampened cloth. You may use an artistic agent, but never abrasive cleaning agents as they will damage the finish.

8-5. Clean wood finish blades with a furniture polishing cloth. Occasionally, apply a light coat of furniture polish for added protection and beauty. Clean painted and high-gloss blades in the same manner as the fan finish.

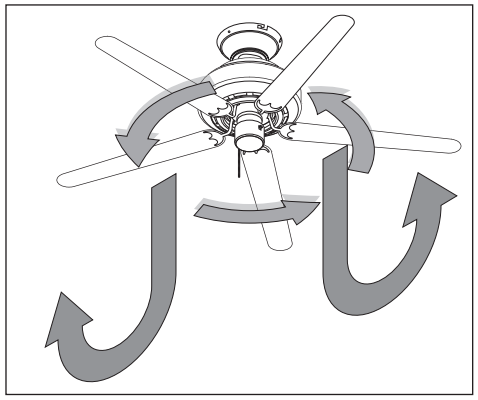

In warm weather, use downward air flow pattern

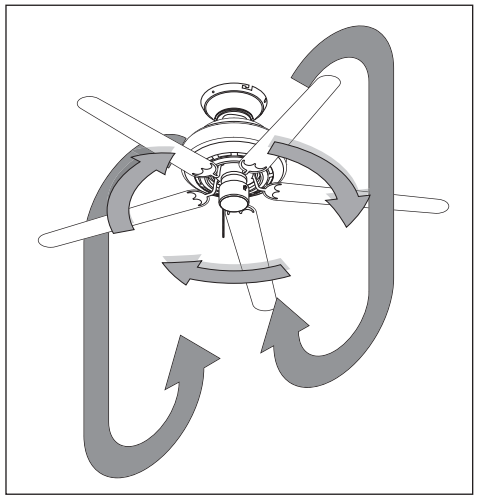

In cold weather, use upward air flow pattern

9 • Troubleshooting

Problem: Nothing happens; fan does not move.

1. Turn power on, replace fuse, or reset breaker.
2. Loosen canopy, check all connections according to the wiring the fan section.
3. Check the plug connection in the switch housing.
4. Pull the pull chain to ensure it is on.
5. Remove the shipping bumpers.

Problem: Noisy operation.

1. Tighten the blade bracket screws until snug.
2. Check to see if the blade is cracked. If so, replace all the blades.

Problem: Excessive wobbling.

1. If your fan wobbles when operating, use the enclosed balancing kit and instructions to balance the fan.
2. Tighten all blade iron screws.
3. Turn power off, support fan very carefully, and check that the hanger ball is properly seated.

If you need parts or service assistance, please call 888-830-1326 or visit us at our WEB site at http://www.hunterfan.com.

Hunter Fan Company
2500 Frisco Avenue
Memphis, Tennessee 38114